

# X5580I-U2 / X5580I-U2x2

## 55" LED-Backlit Multi-touch Display



TouchSystems' X55 is designed for 24/7 operation and is meant to attract attention in high-traffic spaces through its slim bezel, sleek design, and bright screen. The full HD LCD display is complemented by the LED BLU, a component that lowers energy consumption and costs. The display features a standard Open Pluggable Specification (OPS) slot that results in easier installations and maintenance. The X55 is integrated with infra red, a multi-touch technology, and is offered as a dual touch (X5580I-U2x2) or multi-touch (X5580I-U2) solution. The infra red display is Windows 8 ready. For more information, call the TouchSystems sales team at (512) 846-2424.

### AT A GLANCE


- HD LCD display
- Slim Bezel
- LED BLU
- Energy efficient
- OPS slot

### APPLICATIONS

- Retail
- Hospitality
- Corporate
- Education

### Specifications

Panel	X552S
Viewable Image Size	55"
Touch Technology	Infrared
Pixel Pitch	0.63 mm
Brightness	500cd/m <sup>2</sup> (typical)
Contrast Ratio	3000:1
Aspect Ratio	16:9
Resolution	1920 x 1080
Response Time	8 ms
Viewing Angle	178° Vertical; 178° Horizontal
Connectivity	DisplayPort, HDMI, DVI-D, VGA 15-pin D-sub, BNC Composite
Compatibility	Windows 7, Vista, and XP; Linux; Mac OS
Power Consumption	On: 160W; Standby: < 2W
Dimensions (WxHxD)	50.250 x 29.375 x 2.875 in (without stand)
Weight	55.1 lbs (without stand)
VESA Hole Configuration	300mm x 300mm (4 hole)
Operating Temperature	41 - 104° F / 5 - 40° C
Operating Humidity	20 - 80%
Standards	FCC Class B, C-UL, HID-compliant
Limited Warranty	3 Years, Parts and Labor, including Backlight

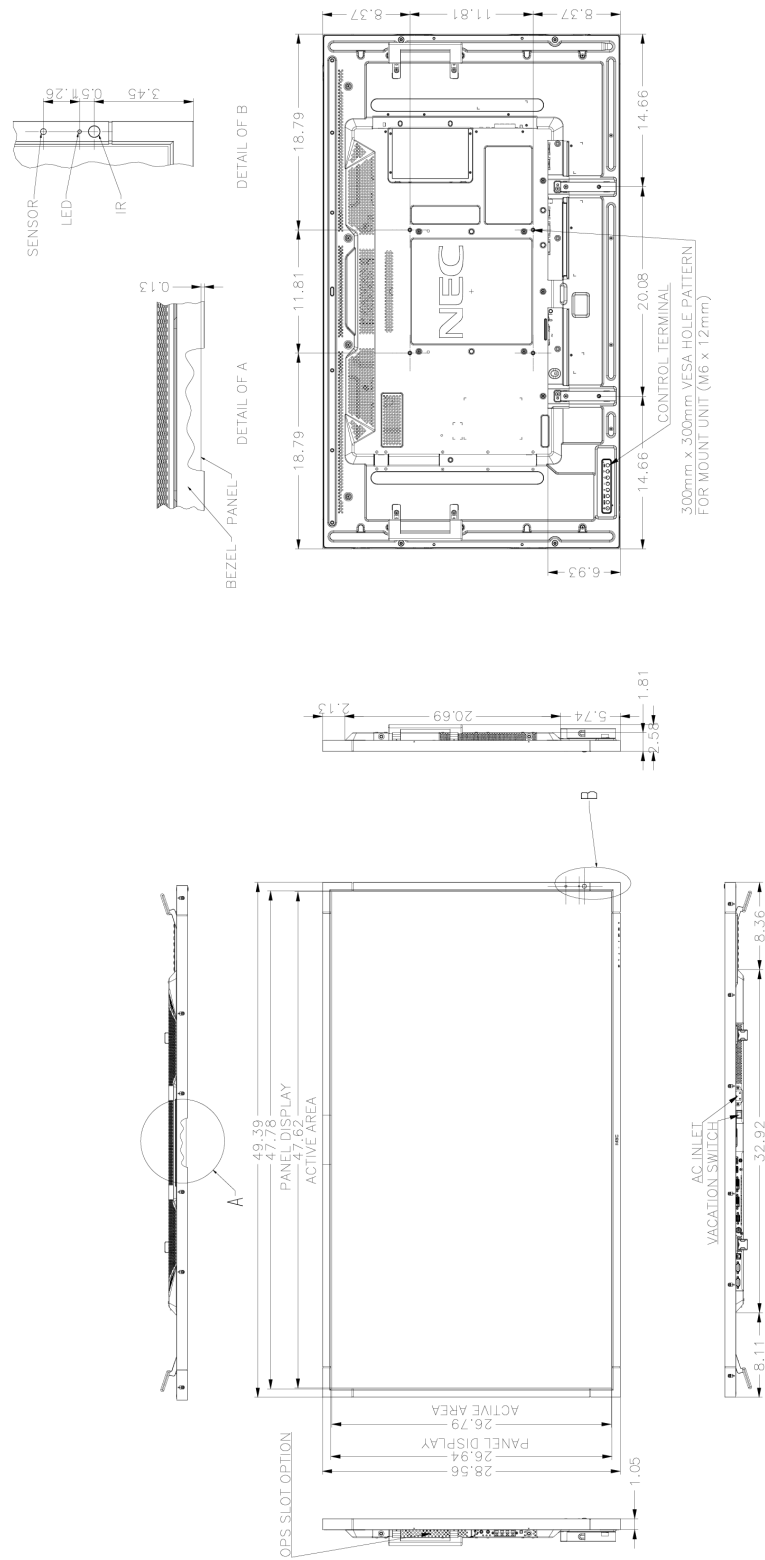

#### CONTACT

220 Tradesmen Dr.  
Hutto, Texas 78634  
1.800.320.5944  
sales@touchsystems.com